




Settings Configuration Guide for SIEMENS C470 IP

Contents

1. Physical Setup.....	3
2. GUI Login	4
3. Settings	5
4. Configuring NTP	10
5. Configuring Voice Mail No.....	10
6. Making Calls	11
7. Additional Handsets.....	11


1. Physical Setup

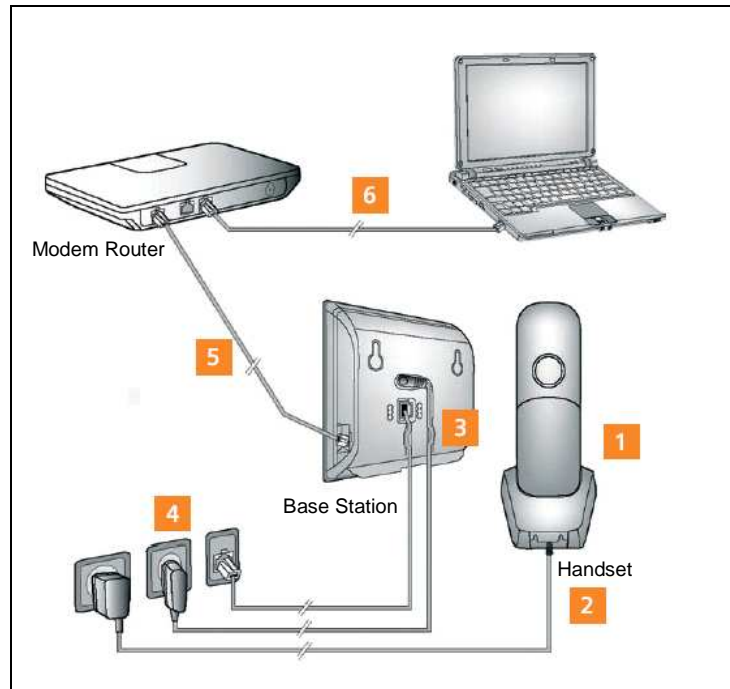

- 1 - Prepare the handset: insert the batteries
- 2 - Connect the charging cradle to the mains power supply and charge the batteries
- 3 - Connect the phone cord and power lead to the base station
- 4 - Connect the base station to the fixed line network and the mains power supply
- 5 - Connect the base station to the Internet, connect the base station to the router (Connection via router and modem or via router with integrated modem)
- 6 - PC in LAN for advanced configuration of the Gigaset C740 IP base station

2. GUI Login

To get the IP of the C470IP, press the paging button of the base, the phone will flash the IP address. Navigate to the IP **http://x.x.x.x** to access the device Web GUI.

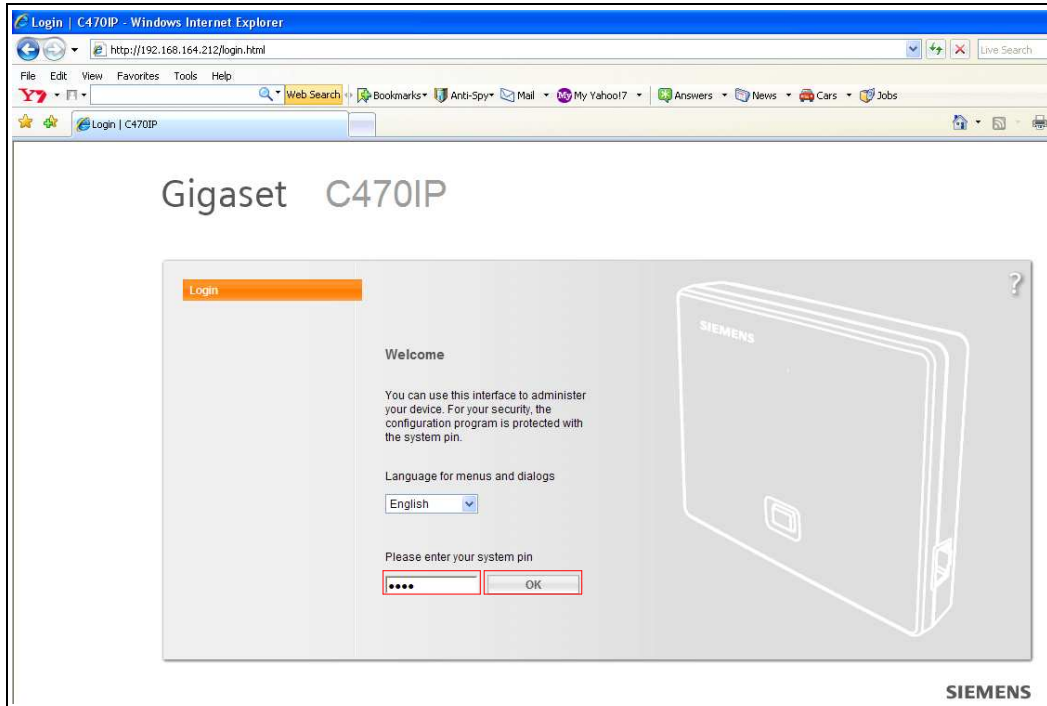


default PIN is **0000**
Then Press OK

3. Settings

Select “Settings” on the top menu



Then select “Telephony” on the side menu

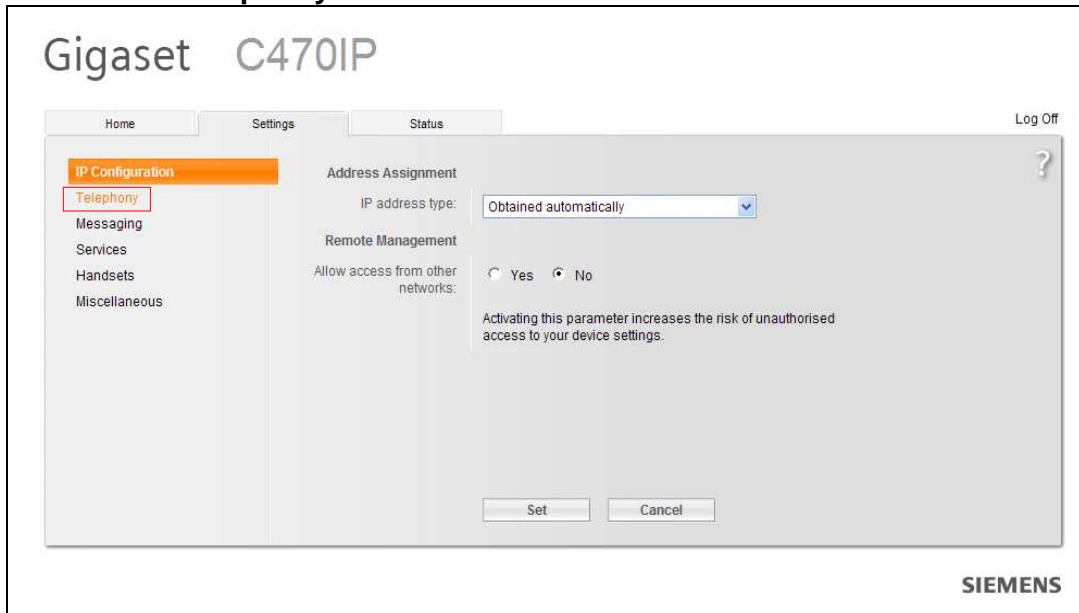

Click on **“Edit”** to configure your MNF Account

Gigaset C470IP

Home Settings Status Log Off

IP Configuration

Telephony

- Connections
- Audio
- Number Assignment
- Call Forwarding
- Dialling Plans
- Network Mailbox
- Advanced Settings

Messaging

Services

Handsets

Miscellaneous

IP Connection

	Name / Provider	Suffix	Status	Active
1.	IP1 Other Provider	#1	Server not accessible	<input checked="" type="checkbox"/>
2.	IP2 Other Provider	#2	Disabled	<input type="checkbox"/>
3.	IP3 Other Provider	#3	Disabled	<input type="checkbox"/>
4.	IP4 Other Provider	#4	Disabled	<input type="checkbox"/>
5.	IP5 Other Provider	#5	Disabled	<input type="checkbox"/>
6.	IP6 Other Provider	#6	Disabled	<input type="checkbox"/>

Gigaset.net

Name	Suffix	Status	Active
Gigaset.net	#9	Registered	<input checked="" type="checkbox"/>

Fixed Line Connection

Name	Suffix	Active
Fixed Line	#0	<input type="checkbox"/>

Connection Name or Number – **MyNetFone**
Then click on **“Select VoIP Provider”**

Gigaset C470IP

Home Settings Status Log Off

IP Configuration

Telephony

- Connections
- Audio
- Number Assignment
- Call Forwarding
- Dialling Plans
- Network Mailbox
- Advanced Settings

Messaging

Services

Handsets

Miscellaneous

1. IP Connection

You can replace the default name with a name or the actual phone number to distinguish this connection.

Connection Name or Number:

Auto Configuration

If your provider has issued you with a configuration code, you can use it to start the automatic connection configuration here.

Auto Configuration Code:

Provider: Other Provider

Personal Provider Data

Authentication Name:

Authentication password:

Username:

Display name:

Click on **“Next”**

Gigaset C470IP

Home Settings Status Log Off

IP Configuration

Telephony

Connections

Audio

Number Assignment

Call Forwarding

Dialling Plans

Network Mailbox

Advanced Settings

Messaging

Services

Handsets

Miscellaneous

Provider Selection

With selection of a provider most of the configuration data (General Provider Data, Listen Ports, Network, Codecs) for this provider are loaded automatically.

There are two steps necessary to get the configuration data:

- Choose country of your VoIP provider.
- Choose your VoIP provider.

To continue, click Next.

< Back **Next >** Cancel

SIEMENS

Choose **“Australia”**

Gigaset C470IP

Home Settings Status Log Off

IP Configuration

Telephony

Connections

Audio

Number Assignment

Call Forwarding

Dialling Plans

Network Mailbox

Advanced Settings

Messaging

Services

Handsets

Miscellaneous

Provider Selection

Please choose the country from the list you want to load the provider list for.

Australia

< Back **Next >** Cancel

SIEMENS

Choose the provider – “MyNetFone AuXX”
Then click on “Finish”

Gigaset C470IP

Home Settings Status Log Off

IP Configuration
Telephony
Connections
Audio
Number Assignment
Call Forwarding
Dialling Plans
Network Mailbox
Advanced Settings
Messaging
Services
Handsets
Miscellaneous

Provider Selection

Please choose the provider from the list you need the configuration data from.

MyNetFone Au00
Freshtel
FreeWorldDial
Globe7
MyNetFone Au00
MyNetFone Au10
NodePhone
Pfingo
SIP Discount
Tesco
Other Provider

< Back Finish > Cancel

Enter your provided **MyNetFone Number** into the **Authentication Name**, **Username** and **Display name** fields.
Enter your supplied **MyNetFone Password** into the **Authentication Password** field.
Then click on “Set”

Gigaset C470IP

Home Settings Status Log Off

IP Configuration
Telephony
Connections
Audio
Number Assignment
Call Forwarding
Dialling Plans
Network Mailbox
Advanced Settings
Messaging
Services
Handsets
Miscellaneous

1. IP Connection

You can replace the default name with a name or the actual phone number to distinguish this connection.

Connection Name or Number: MyNetFone

Auto Configuration

If your provider has issued you with a configuration code, you can use it to start the automatic connection configuration here.

Auto Configuration Code:

Start Auto Configuration

Provider: MyNetFone Au00 Select VoIP Provider

Personal Provider Data

Authentication Name: 09xxxxxx

Authentication password: *****

Username: 09xxxxxx

Display name: 09xxxxxx

Show Advanced Settings

Set Cancel Delete

Check your MNF Account status

Registered – Account is registered and ready for use

The screenshot shows the 'Status' page for a Gigaset C470IP device. The left-hand menu is expanded to 'Connections'. The main content area is divided into 'IP Connection' and 'Fixed Line Connection' sections. In the 'IP Connection' section, a table lists six IP addresses. The first entry, IP1 (MyNetFone Au00) with suffix #1, has a status of 'Registered' (highlighted with a red box) and is active. The other five IP addresses (IP2-IP6) are 'Disabled' and inactive. Below this, the 'Gigaset.net' section shows a single entry with name 'Gigaset.net', suffix #9, and status 'Registered' (also highlighted with a red box), which is active. The 'Fixed Line Connection' section shows a single entry for 'Fixed Line' with suffix #0 and an 'Edit' button.

Name / Provider	Suffix	Status	Active
1. IP1 MyNetFone Au00	#1	Registered	<input checked="" type="checkbox"/>
2. IP2 Other Provider	#2	Disabled	<input type="checkbox"/>
3. IP3 Other Provider	#3	Disabled	<input type="checkbox"/>
4. IP4 Other Provider	#4	Disabled	<input type="checkbox"/>
5. IP5 Other Provider	#5	Disabled	<input type="checkbox"/>
6. IP6 Other Provider	#6	Disabled	<input type="checkbox"/>

Name	Suffix	Status	Active
Gigaset.net	#9	Registered	<input checked="" type="checkbox"/>

Name	Suffix	Active
Fixed Line	#0	<input type="checkbox"/>

SIEMENS

Select **“Handsets”** on the Left Menu
 Input **“MyNetFone”** on the Name Field
 Then click on **Set**

The screenshot shows the 'Registered Handsets' page for a Gigaset C470 IP device. The left-hand menu is expanded to 'Handsets'. The main content area shows a table with one entry: No. 1, Name 'MyNetFone' (highlighted with a red box). Below the table, there are options for 'Directory' (radio button selected for 'INT 1'), a 'Transfer directory to handset' section with a 'Browse...' button and a 'Transfer' button, and a 'Handset Directory' section with 'Save' and 'Delete' buttons. At the bottom, there is a 'VoIP Status' section with radio buttons for 'Yes' and 'No' (selected), and a 'Show VoIP status on handset' section. The 'Set' button is highlighted with a red box.

No.	Name
1	MyNetFone

SIEMENS

4. Configuring NTP

Select **“Miscellaneous”** on the Left Menu
 Input **“125.213.163.250”** on the Time Server Field
 Select the correct **Time Zone**, then click **Set**

The screenshot shows the 'Miscellaneous' settings page for a Gigaset C470 IP phone. The 'Time' section is highlighted, showing the following configuration:

- Automatic adjustment of System Time with Time Server: Yes No
- Last synchronisation with time server: 03.06.2009 07:52 am
- Time Server:
- Country:
- Time Zone:
- Automatically adjust clock to summer-time changes: On Off

Buttons for 'Set' and 'Cancel' are visible at the bottom of the configuration area.

5. Configuring Voice Mail No.

Select **“Network Mailbox”** on the Left Menu
 Input **“121”** on the Call Number Field, tick **Active** then click **Set**


The screenshot shows the 'Network Mailbox' settings page for a Gigaset C470 IP phone. The configuration table is as follows:

Connection	Call number	Active
MyNetFone	<input type="text" value="121"/>	<input checked="" type="checkbox"/>
IP2	<input type="text"/>	<input type="checkbox"/>
IP3	<input type="text"/>	<input type="checkbox"/>
IP4	<input type="text"/>	<input type="checkbox"/>
IP5	<input type="text"/>	<input type="checkbox"/>
IP6	<input type="text"/>	<input type="checkbox"/>
Fixed Line	<input type="text"/>	<input type="checkbox"/>

Buttons for 'Set' and 'Cancel' are visible at the bottom of the configuration area.

6. Making Calls

Your device has now been configured for use with MyNetFone.

- Enter a phone number using your handset's number keys.
- Briefly press the talk key  if you want to make a **VoIP call**.

Or

- Press and hold the talk key if you want to make a call via **fixed line network** (if base station is connected to a fixed line network)

7. Additional Handsets

C470IP Base station can register up to 5 additional handsets. Multiple handsets can be registered to be used with a single endpoint or multiple endpoints.

Handset registration process:

- Power-up additional handset
- On the phone menu, Navigate to Settings > Handset > Register H/Set
- Enter your system PIN, (default is "0000")
- Press and hold INTERCOM button on base station until handset is registered.

Once handsets are registered, it can be managed via the Web interface.

Gigaset C470 IP

The screenshot shows the 'Registered Handsets' configuration page in the My Net Fone web interface. The page has a navigation menu on the left with 'Handsets' highlighted. The main content area is titled 'Registered Handsets' and contains the following sections:

- Registered Handsets Table:** A table with two columns: 'No.' and 'Name'. It lists three handsets: 1 (Main), 2 (Living), and 3 (Dining). Each row has a dropdown menu for the number and a text input field for the name.
- Directory:** A section for selecting a handset for directory transfer. It has radio buttons for 'Main' (selected), 'Living', and 'Dining'.
- Transfer directory to handset:** A section with a 'Choose File' button and the text 'No file chosen'. Below it is a 'Transfer' button.
- Handset Directory:** A section with 'Save' and 'Delete' buttons.
- VoIP Status:** A section with radio buttons for 'Yes' and 'No' (selected). Below it are 'Set' and 'Cancel' buttons.