




Settings Configuration Guide for SIEMENS C470 IP



Contents

1. Physical Setup.....	3
2. GUI Login	4
3. Settings	5
4. Configuring NTP	8
5. Configuring Voice Mail No.....	9
6. Making Calls	9
7. Additional Handsets.....	10


1. Physical Setup

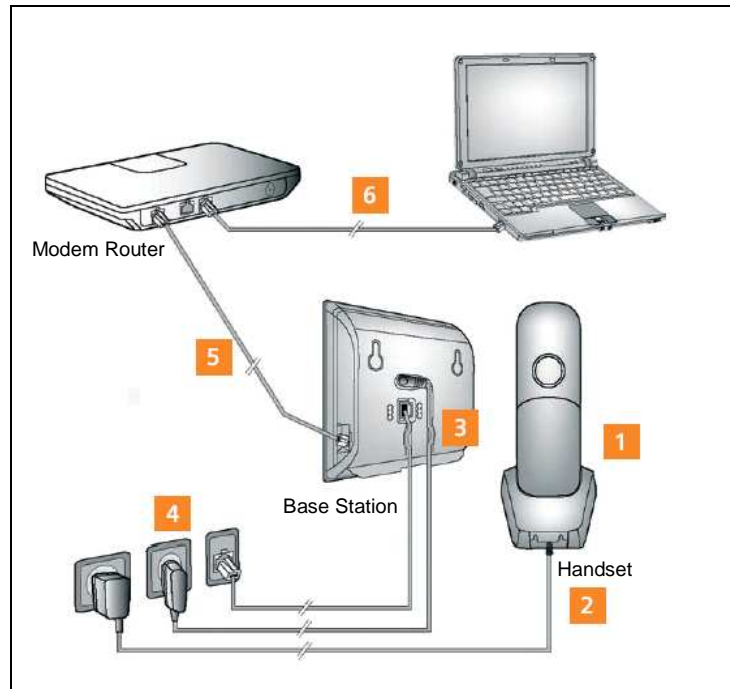

- 1 - Prepare the handset: insert the batteries
- 2 - Connect the charging cradle to the mains power supply and charge the batteries
- 3 - Connect the phone cord and power lead to the base station
- 4 - Connect the base station to the fixed line network and the mains power supply
- 5 - Connect the base station to the Internet, connect the base station to the router (Connection via router and modem or via router with integrated modem)
- 6 - PC in LAN for advanced configuration of the Gigaset C740 IP base station

2. GUI Login

To get the IP of the C470IP, press the paging button of the base, the phone will flash the IP address. Navigate to the IP **http://x.x.x.x** to access the device Web GUI.

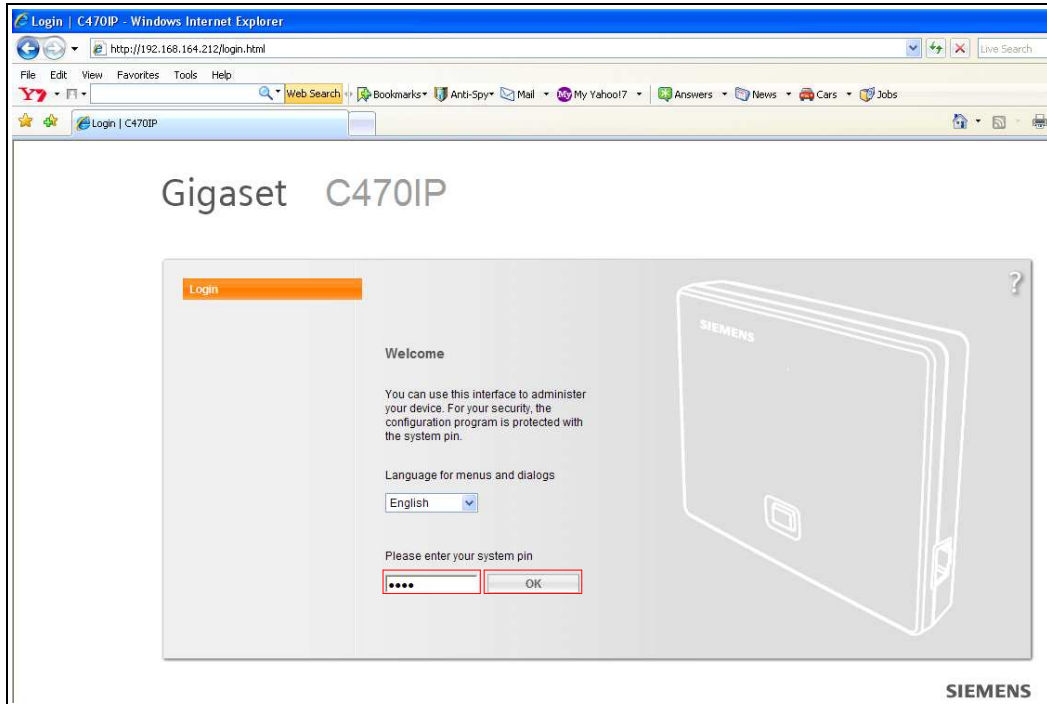


default PIN is **0000**
Then Press OK

3. Settings

Select “Settings” on the top menu



Then select “Telephony” on the side menu

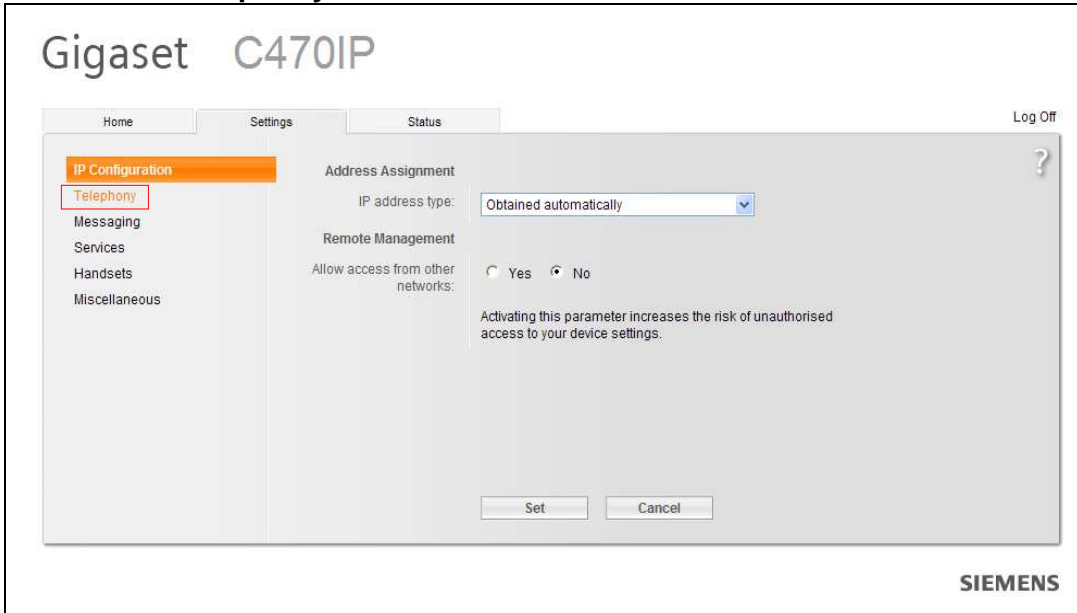

Click on **“Edit”** to configure your MNF Account

Gigaset C470IP

Home Settings Status Log Off

IP Configuration

Telephony

- Connections
- Audio
- Number Assignment
- Call Forwarding
- Dialling Plans
- Network Mailbox
- Advanced Settings

Messaging

Services

Handsets

Miscellaneous

IP Connection

	Name / Provider	Suffix	Status	Active
1.	IP1 Other Provider	#1	Server not accessible	<input checked="" type="checkbox"/>
2.	IP2 Other Provider	#2	Disabled	<input type="checkbox"/>
3.	IP3 Other Provider	#3	Disabled	<input type="checkbox"/>
4.	IP4 Other Provider	#4	Disabled	<input type="checkbox"/>
5.	IP5 Other Provider	#5	Disabled	<input type="checkbox"/>
6.	IP6 Other Provider	#6	Disabled	<input type="checkbox"/>

Gigaset.net

Name	Suffix	Status	Active
Gigaset.net	#9	Registered	<input checked="" type="checkbox"/>

Fixed Line Connection

Name	Suffix	Active
Fixed Line	#0	<input type="checkbox"/>

Connection Name or Number – **MyNetFone**
 Then on Auto Configuration Code – **329**
 Click on **‘Start Auto Configuration’**
 Gigaset C470 IP

Home Settings Status Log Off

IP Configuration

Telephony

- Connections
- Audio
- Number Assignment
- Call Forwarding
- Dialling Plans
- Network Mailbox
- Advanced Settings

Messaging

Services

Handsets

Miscellaneous

1. IP Connection

You can replace the default name with a name or the actual phone number to distinguish this connection.

Connection Name or Number:

Auto Configuration

If your provider has issued you with a configuration code, you can use it to start the automatic connection configuration here.

Auto Configuration Code:

Provider: Other Provider

Personal Provider Data

Authentication Name:

Authentication password:

Username:

Display name:

Once done, it will download the line settings for the device as shown below:

Gigaset C470 IP

The screenshot shows the '1. IP Connection' configuration page. The 'Connections' menu item is highlighted in the left sidebar. The main content area includes:

- Connection Name or Number:** A text field containing 'Mynetfone'.
- Auto Configuration:** A section with a text field for 'Auto Configuration Code' containing '329' and a 'Start Auto Configuration' button.
- Provider:** A dropdown menu set to 'MyNetFone' with a 'Select VoIP Provider' button.
- Personal Provider Data:** Fields for 'Authentication Name' (09xxxxxx), 'Authentication password' (masked with asterisks), 'Username' (09xxxxxx), and 'Display name'.
- Buttons for 'Show Advanced Settings', 'Set', 'Cancel', and 'Delete'.

Check your MNF Account status

Registered – Account is registered and ready for use

The screenshot shows the 'Gigaset C470IP' status page. The 'Status' menu item is highlighted in the left sidebar. The main content area displays a table of IP connections and their status:

IP Connection		Name / Provider	Suffix	Status	Active
1.	IP1	MyNetFone Au00	#1	Registered	<input checked="" type="checkbox"/>
2.	IP2	Other Provider	#2	Disabled	<input type="checkbox"/>
3.	IP3	Other Provider	#3	Disabled	<input type="checkbox"/>
4.	IP4	Other Provider	#4	Disabled	<input type="checkbox"/>
5.	IP5	Other Provider	#5	Disabled	<input type="checkbox"/>
6.	IP6	Other Provider	#6	Disabled	<input type="checkbox"/>

Gigaset.net		Name	Suffix	Status	Active
		Gigaset.net	#9	Registered	<input checked="" type="checkbox"/>

Fixed Line Connection		Name	Suffix	Active
		Fixed Line	#0	<input type="checkbox"/>

The 'Registered' status in the first row of the IP Connection table is highlighted with a red box. The 'SIEMENS' logo is visible in the bottom right corner of the page.

Select **“Handsets”** on the Left Menu
 Input **“MyNetFone”** on the Name Field
 Then click on **Set**

Gigaset C470 IP

Home Settings Status Log Off

IP Configuration
 Telephony
 Messaging
 Services
Handsets
 Miscellaneous

Registered Handsets

No.	Name
1	MyNetFone

Directory

Handset: INT 1

Transfer directory to handset:

Handset Directory:

VoIP Status

Show VoIP status on handset: Yes No

SIEMENS

4. Configuring NTP

Select **“Miscellaneous”** on the Left Menu
 Input **“125.213.163.250”** on the Time Server Field
 Select the correct **Time Zone**, then click **Set**

Gigaset C470 IP

Home Settings Status Log Off

IP Configuration
 Telephony
 Messaging
 Services
 Handsets
Miscellaneous

File locations

Data server:

User defined firmware file:

Automatic check for software/profile updates: Yes No

On starting the firmware update the device checks if the requirements of a successful firmware download are fulfilled. The firmware is then downloaded without additional feedback. During download and update the handset/base connection is lost. A successful update results in the handset re-establishing the base connection.

Time

Automatic adjustment of System Time with Time Server: Yes No

Last synchronisation with time server: 03.06.2009 07:52 am

Time Server:

Country:

Time Zone:

Automatically adjust clock to summer-time changes: On Off

5. Configuring Voice Mail No.

Select “**Network Mailbox**” on the Left Menu

Input “**121**” on the Call Number Field, tick **Active** then click **Set**

Gigaset C470 IP

Home Settings Status Log Off

IP Configuration

Telephony

Connections

Audio

Number Assignment

Call Forwarding

Dialling Plans

Network Mailbox

Advanced Settings

Messaging

Services

Handsets

Miscellaneous


Connection	Call number	Active
MyNetFone	121	<input checked="" type="checkbox"/>
IP2		<input type="checkbox"/>
IP3		<input type="checkbox"/>
IP4		<input type="checkbox"/>
IP5		<input type="checkbox"/>
IP6		<input type="checkbox"/>
Fixed Line		<input type="checkbox"/>

Set Cancel

SIEMENS

6. Making Calls

Your device has now been configured for use with MyNetFone.

- Enter a phone number using your handset's number keys.
- Briefly press the talk key  if you want to make a **VoIP call**.

Or

- Press and hold the talk key if you want to make a call via **fixed line network** (if base station is connected to a fixed line network)

7. Additional Handsets


C470IP Base station can register up to 5 additional handsets. Multiple handsets can be registered to be used with a single endpoint or multiple endpoints.

Handset registration process:

- Power-up additional handset
- On the phone menu, Navigate to Settings > Handset > Register H/Set
- Enter your system PIN, (default is "0000")
- Press and hold INTERCOM button on base station until handset is registered.

Once handsets are registered, it can be managed via the Web interface.

Gigaset C470 IP

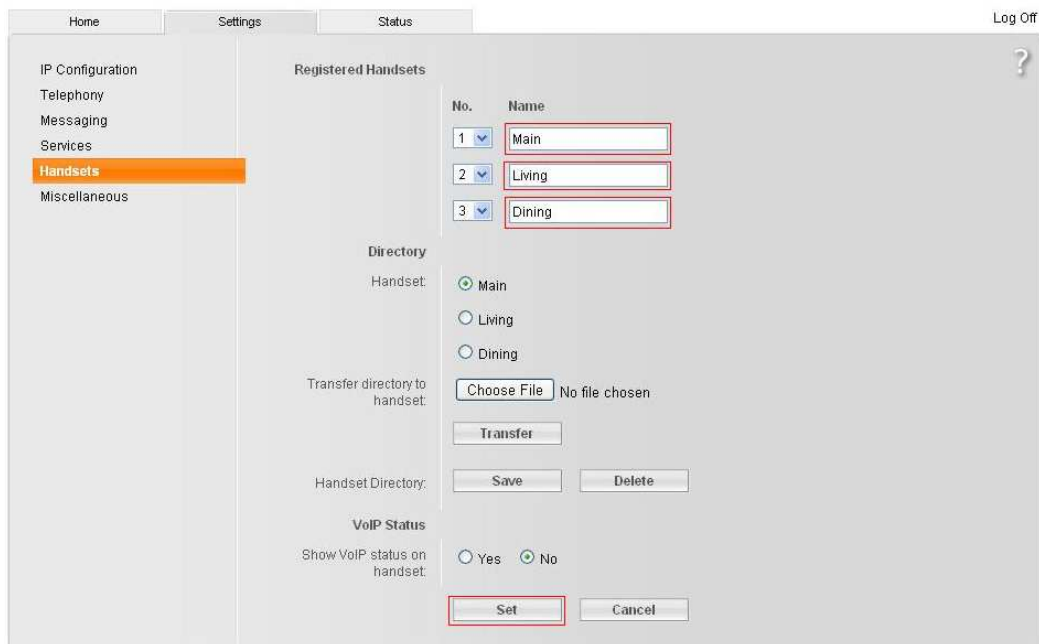

The screenshot shows the web interface for the Gigaset C470 IP. The top navigation bar includes 'Home', 'Settings', and 'Status', with 'Settings' selected. A 'Log Off' link is in the top right corner. A left sidebar contains a menu with 'Handsets' highlighted in orange. The main content area is titled 'Registered Handsets' and contains the following sections:

- Registered Handsets:** A table with two columns: 'No.' and 'Name'. It lists three handsets:

No.	Name
1	Main
2	Living
3	Dining
- Directory:** A section for selecting a handset for the directory. It has radio buttons for 'Main' (selected), 'Living', and 'Dining'.
- Transfer directory to handset:** A section with a 'Choose File' button (labeled 'No file chosen') and a 'Transfer' button.
- Handset Directory:** A section with 'Save' and 'Delete' buttons.
- VoIP Status:** A section with radio buttons for 'Yes' and 'No' (selected), and a 'Show VoIP status on handset' label.

At the bottom of the main content area, there are 'Set' and 'Cancel' buttons.