


DSL Setup Guide for Billion 7401VGP R3

1. Open your web browser (e.g. Internet Explorer, Mozilla Firefox, Google Chrome, etc)
2. Enter the following into the address bar: **192.168.1.254**
3. You will be prompted to enter a username and password
 - **Username:** admin
 - **Password:** admin
4. Click on **Login**
5. On the menu on the left side, click on **WAN**

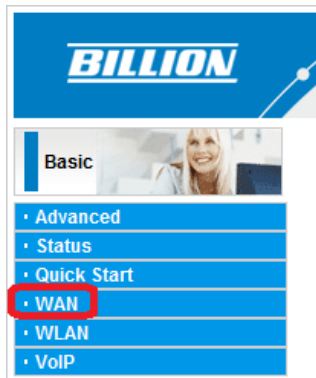

6. For **Protocol** - select **PPPoE**
7. For **VPI** - enter 8
8. For **VCI** - enter 35
9. For **Username** - enter your MyNetFone DSL Username (*make sure to use the correct username format e.g. username@dsl.mynetfone.com.au*)
10. For **Password** - enter your MyNetFone DSL Password

The image shows the 'Configuration' page with the 'WAN Port' section expanded. The 'WAN Connection' is set to 'ADSL'. The 'Protocol' dropdown is set to 'PPPoE (RFC2516, PPP over Ethernet)'. The 'VPI/VCI' field is set to '8 / 35'. The 'Username' field is set to 'Username@dsl.mynetf'. The 'Password' field is masked with dots. The 'Service Name' field is empty. The 'Auth. Protocol' is set to 'Chap(Auto)'. The 'MTU' is set to '1492'. The 'IP Address' is set to '0.0.0.0'. The 'Obtain DNS automatically' checkbox is checked. The 'Primary DNS/Secondary DNS' fields are set to '0.0.0.0'. A warning message is displayed: 'Please note: This change will clear all settings that related to WAN interface, like Virtual Server. If you want to keep the setting, please switch to Advanced mode.' The 'Apply' button is visible at the bottom.

11. Click on **Apply**
12. Click on **Save Config** in the bottom right corner
13. You will be asked to confirm. Click on **Apply** to save your settings (note, it may take up to one minute to save your settings)
14. Click on **Logout** in the bottom right corner