


Connecting Your Modem

If you got your modem from MyNetFone, then all you need to do is plug it in by following the steps below:

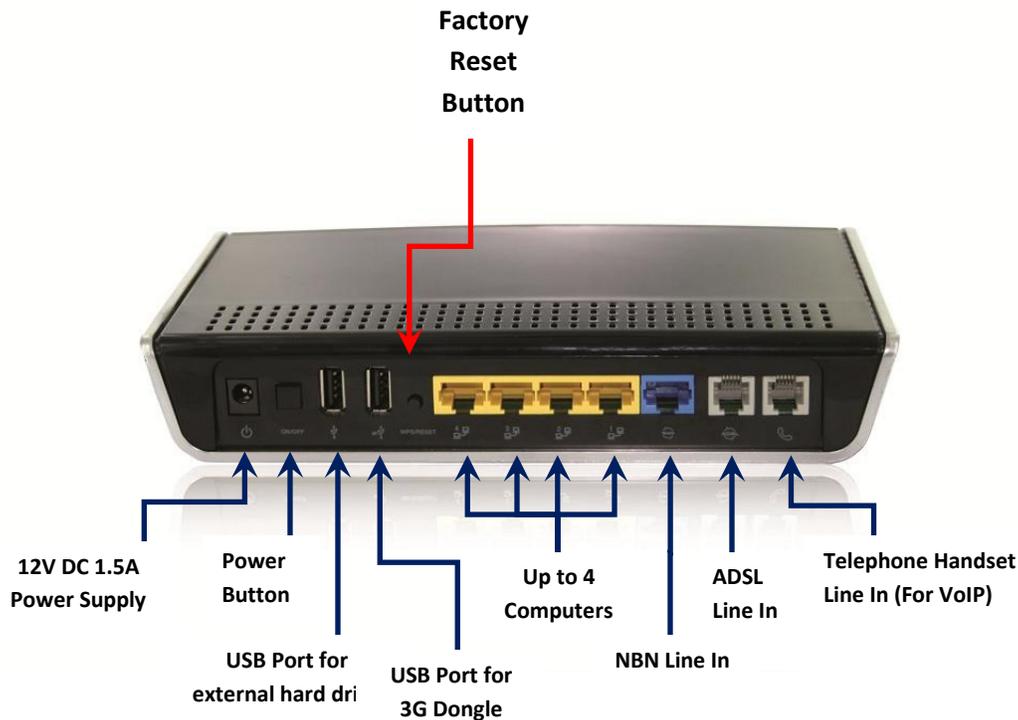

1. Connect one end of the RJ-45 Ethernet cable to one of the LAN ports (Yellow) and the other end to your computer. Skip to Step 3 if you have Naked ADS2+
2. If you have Traditional ADSL/ADSL2+ - connect the Plain Old Telephone Service (POTS) pass-through line:
 - Connect the telephone wall socket to the Line port on the in-line splitter.
 - Connect one end of an RJ-11 (telephone) cable to the Phone port of the in-line splitter and the other end to the DSL port on the modem.
3. Connect one end of the RJ-11 (telephone) cable to the ADSL port on the back of the modem router and the other end to the ADSL wall socket.

Note: If you have NBN, connect one end of the RJ-45 (Network) cable to the WWW port (Blue) on the back of the modem router and the other end to the NBN Network Termination Unit (NTU)

4. Connect the power adaptor to your modem router and press the power button to turn on the modem router.

Wireless Setup



1. Open a web browser (e.g. Internet Explorer, Firefox, Safari, etc) and type in 192.168.1.1 into the address bar.
2. You will be prompted to enter a username and password.
 - **Username:** admin
 - **Password:** admin

Note: To maintain the security of your modem, we advise that you change your login details. Please see Pg. 4 for instructions.

3. Click on Login and this will take you to your basic web configuration page. Click on 'Wireless' tab as shown in the above picture.
4. Tick 'On' on the Wireless (WiFi) button.
5. Then enter your desired unique WiFi Network Name to identify your wireless network.
6. Enter your desired unique password for WPA/WAPI Passphrase. Please keep this key in a safe place as anyone with access to this key will be able to gain access to your private network.
7. Tip: We recommend a good password practice by using combination of alphabets and numbers with at least 8 characters long.
8. Click 'Save and apply the changes'. Congratulations, your wireless connection has successfully been setup!

For security reasons, we advise you to disable your wireless LAN when not in use for a long period of time and to ensure that security is always enabled.

Ensure your Internet connection remains secure:

1. Do not enable remote access
2. Change wireless password from default
3. Change Admin password from default. (See instruction below).

Change your Default Admin Password

1. Open a web browser (e.g. Internet Explorer, Firefox, Safari, etc) and type in 192.168.1.1 into the address bar.
2. You will be prompted to enter a username and password.
 - **Username:** admin
 - **Password:** admin
3. Click on Login and this will take you to your basic web configuration page. Click on 'switch to advanced view' at the bottom left of the basic web configuration page.
4. Select 'Network Setup' and then 'Change Password' on the top menu. This page will allow you to change the username and password for your modem.

NetComm®
NB16WV - ADSL2+ Wireless N Modem Router with VoIP

▶ Status
▶ Network Setup
▶ Forwarding Rules
▶ Security Settings
▶ Advanced Settings
▶ Toolbox

Item	Setting
Username	<input type="text" value="admin"/> (*Change this if you need to change Username.)
Old Password	<input type="text"/>
New Password	<input type="text"/>
Reconfirm	<input type="text"/>
<input type="button" value="Save"/> <input type="button" value="Undo"/>	

5. To change the default settings, please enter your desired New Username and New Password in the fields above.
6. Click 'Apply' to save your new login details.

For more information visit: www.mynetfone.com.au/support/internetsecurity