


Wireless Setup Guide for Netgear DG834G / DG834GV

1. Ensure your computer is connected to your Billion modem with an Ethernet cable
2. Open your web browser (e.g. Internet Explorer, Mozilla Firefox, Google Chrome, etc)
3. Enter the following into the address bar: **192.168.0.1**
4. You will be prompted to enter a username and password
 - **Username:** admin
 - **Password:** password
5. Click on **Login**
6. In the left side menu, click on **Wireless Settings**
7. Change the **ESSID** to something that is unique. The ESSID differentiates one WLAN from another
8. For **Region** - select Australia
9. For **Security Options** - select WPA2-PSK(Wi-Fi Protected Access 2 with Pre-Shared Key)
10. Type a unique password for **WPA-PSK Security Encryption**

This password is required to login to your wireless connection. When a computer tries to connect to your Network, they will be asked to enter a password.

Creating the Password:

- Must have a minimum of 8 alphanumeric characters
- Case sensitive

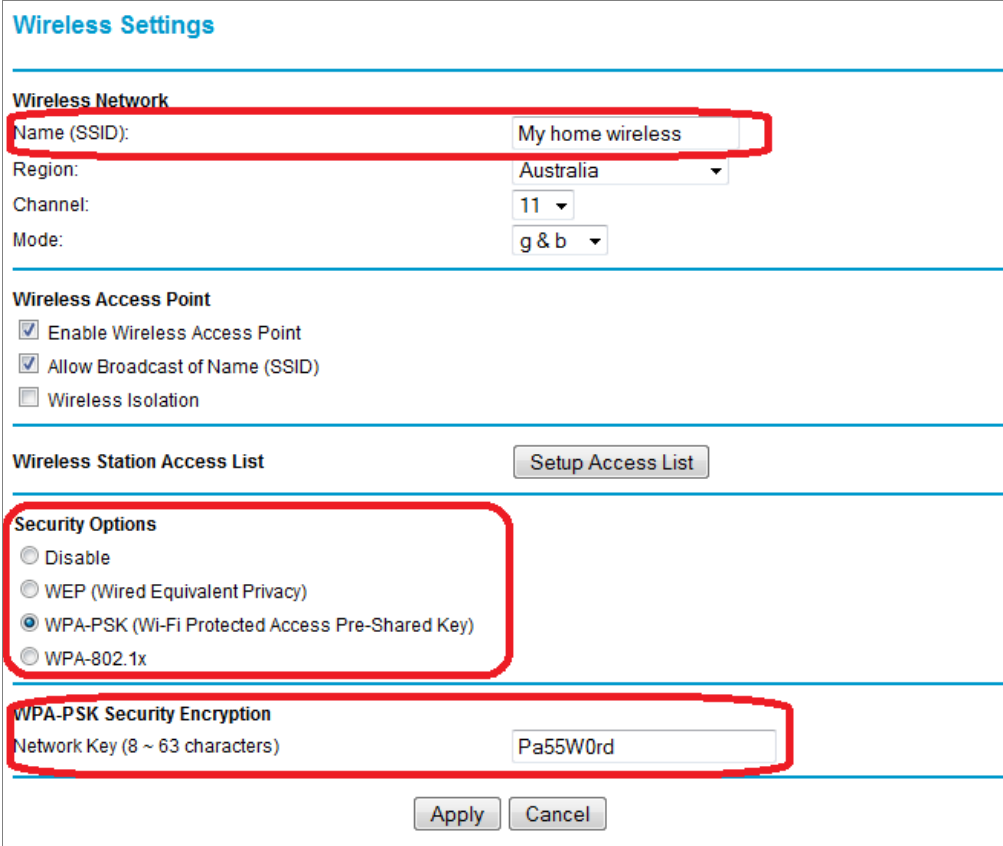

Wireless Settings

Wireless Network

Name (SSID): My home wireless

Region: Australia

Channel: 11

Mode: g & b

Wireless Access Point

Enable Wireless Access Point

Allow Broadcast of Name (SSID)

Wireless Isolation

Wireless Station Access List [Setup Access List](#)

Security Options

Disable

WEP (Wired Equivalent Privacy)

WPA-PSK (Wi-Fi Protected Access Pre-Shared Key)

WPA-802.1x

WPA-PSK Security Encryption

Network Key (8 ~ 63 characters) Pa55W0rd

[Apply](#) [Cancel](#)

11. Click on **Apply**